




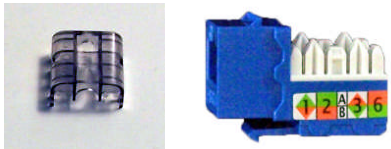


Jacks and Inserts

| | | |
|--|--|---|
| <p>Category 5E High Density</p> | | <p>ATS-5EHD-*</p> |
| <p>Meet or exceed all TIA/EIA/T568A/T568B requirements for Category 5E Specifications ETL Verified for component or channel compliance Feature color-coding for both T568A and T568B wiring Meet FCC Part 68 UL,cUL Listed Includes See-thru Dust Covers in Blue (B) White (W) Orange (O) Ivory (I) Almond (A) Black (E) Yellow (Y) Red (R) Green (T) Gray (G)</p> | |  |
| <p>Category 6</p> | | <p>ATS-6-*</p> |
| <p>Meet or exceed all TIA/EIA/T568A/T568B requirements for Category 5E Specifications ETL Verified for component or channel compliance Feature color-coding for both T568A and T568B wiring Meet FCC Part 68 UL,cUL Listed Includes See-thru Dust Covers in Blue (B) White (W) Orange (O) Ivory (I) Almond (A) Black (E) Yellow (Y) Red (R) Green (T) Gray (G)</p> | |  |
| <p>Voice Grade USOC RJ11</p> | | <p>ATS-VG6-*</p> |
| <p>6 position / 6 conductor Meet FCC Part 68 UL,CUL Listed ETL Verified Includes See-thru Dust Covers in White (W) Ivory (I) Almond (A)</p> | |  |
| <p>ST Fiber Optic Insert</p> | | <p>ATS-STFO-*</p> |
| <p>High-impact, flame-resistant plastic UL, CUL Listed Smooth Finish in White (W) Ivory (I) Almond (A)</p> | |  |
| <p>Blank Insert</p> | | <p>ATS-BI-*</p> |
| <p>High-impact, flame-resistant plastic Blank Inserts used for filling unused positions UL, CUL Listed Smooth Finish in White (W) Ivory (I) Almond (A) Sold in Packages of 10</p> | |  |
| <p>Surface Mount Box</p> | | <p>ATS-SMH-#-*</p> |
| <p>High-impact, flame-resistant plastic UL, CUL Listed Smooth Finish Available in 1, 2, and 4 port configurations in White (W) Ivory (I) Almond (A) Includes Adhesive Backs</p> | |  |