


# ATS-10024CMR-3-G

100 Pr 24 Awg Category 3 CMR UTP

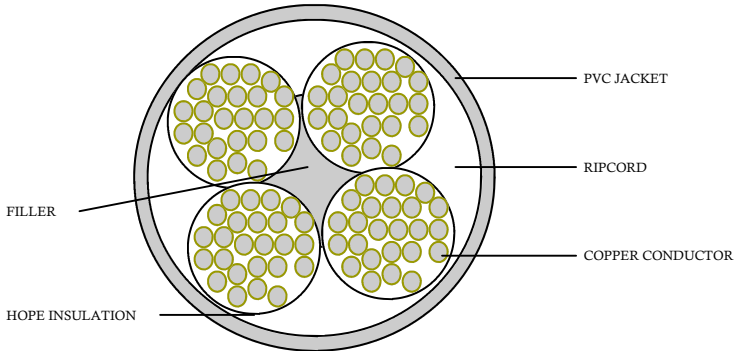

<b>CHARACTERISTICS</b>		
Temperature Rating		-20°C to °C
Capacitance		5.6pF/100 meters
Capacitance Unbalance		500pF/100 meters
DC Resistance 20°C		9.38 Ohms/100 meters
DC Resistance / Unbalance		<=5%
Insulation Resistance		500mΩ/100 meters
Dielectric Strength		DC 1.5KV, 1 min.
Weight		375 lbs
<b>CONSTRUCTION</b>		<b>PACKAGING</b>
25 Twisted Pair Cable		1000 FT
Pair Insulation: PE		Wood Reel
24 Awg Solid Copper		
Ripcord		
Outer Jacket: PVC		
OD .74 in / 18.796 mm		
Jacket Colors: Gray		
		<b>APPROVALS</b>
		ISO 9001
		UL, cUL, CSA, ETL
		UL Listed CM, CMR
		ANS/TIA/EIA 568B.2
		NEC/CEC: CMR
		ISO/IEC 11801

ELECTRICAL PERFORMANCE				
Frequency (MHz)	SLR (dB)	Attenuation (dB/100 m)	Near End Cross Talk (dB)	Impedance (Ohms)
0.772	12	2.2	43	100 +/- 15
1	12	2.6	41	100 +/- 15
4	12	5.6	32	100 +/- 15
8	12	8.5	28	100 +/- 15
10	12	9.7	26	100 +/- 15
16	10	13.1	23	100 +/- 15