



ATS-6A-X

Jack Module Cat6A UTP 10G White

ISOMETRIC VIEW

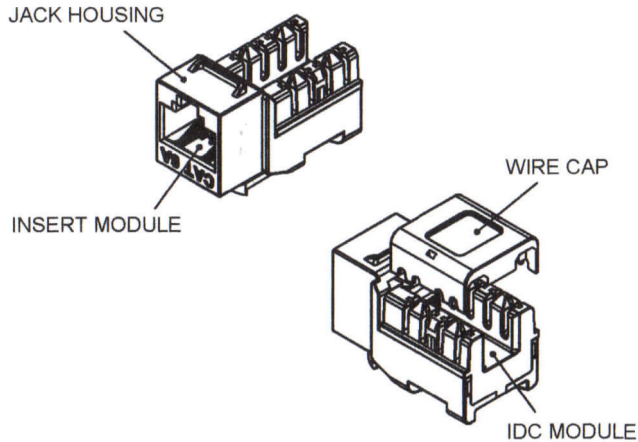

ASSEMBLY DIMENSION

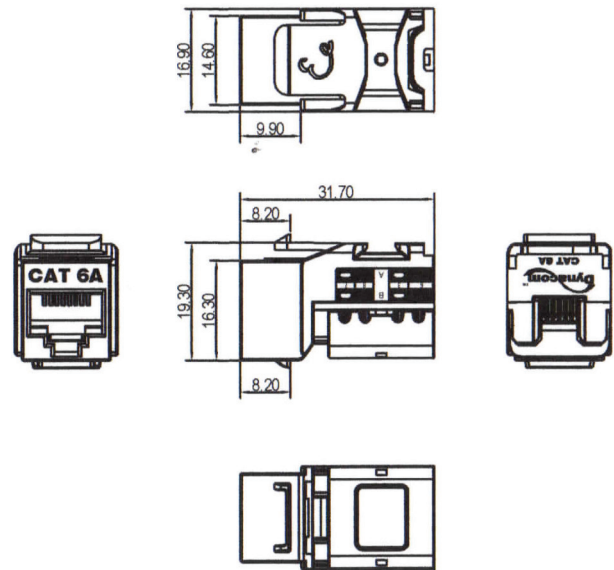

Information

Meets all requirements specified in connecting hardware requirements of ANSI/TIA-568-C.2 Cat.6A

Electrical insulation resistance: 500M Ω min @ 100V d.c.

Dielectric withstanding voltage: 1000V d.c. or a.c. peak contact to contact @ 60Hz for 1 minute

Insertion / extraction life: 750 cycles min

IDC wire guage: 22 ~ 24 AWG

Housing: High-impact, flame-retardant plastic, UL 94V-0

Spring wire: Phosphor bronze alloy plated with 50 micro-inch 100% SN alloy

Jack installs to standard keystone port

Compatible with KwikTool (P/N: 3190-KT)

Dimensions: MM // Scale: Full // Drawing No: 10606AK-WH // Drawing Date: 7/25/14