

APPROVED BY

SPECIFICATION

·Meets TIA/EIA-568B-C.2 requirements

Electrical

- Insulation Resistance : 500 MOhm minimum @ 100 Vdc
- Dielectric Withstanding Voltage : 1000 Vac rms @ 60Hz for one minute

Mechanical

- Conductor compatibility : 22~24AWG
- Temperature range storage : -40℃ ~ +70℃
- Temperature range operation : -10℃ ~ +60℃
- Relative humidity operation : Maximum noncondensing 93%

Materials


- COVER : SPCC , 1.5mm , BLACK COLOR PAINTED.
- Housing : High Impact flame retardant plastic,UL 94 V-0 Rated
- Spring wire : Phosphor Bronze alloy plated with gold over nickel
- IDC : Phosphor Bronze alloy plated with tin
- BASE : High Impact flame retardant plastic,UL 94 V-0 Rated

NO	DATE	BY	CHANGE	APPR.	DATE
REVISIONS					


NO	NOTES	
1	Part : 0.2	Drawing : 0.2
2	11-May-17 01:54:50 PM Modified By WCF	

TITLE		
24 PORT PATCH PANEL		
DIM:	SCALE	MODEL
MM= ± 3	0.350	ATS-xxx-N-24P
MATERIAL		
COATING	HARDNESS	FINISH
DRAWN BY	CHECKED	APPROVED
WCF 2017/5/11		
LITEK [®] ELECTRONICS INC.		
SHEET 1 OF 2	DRAWING NO.	REV
	MTL-80086	0

NO	NOTES
1	
2	

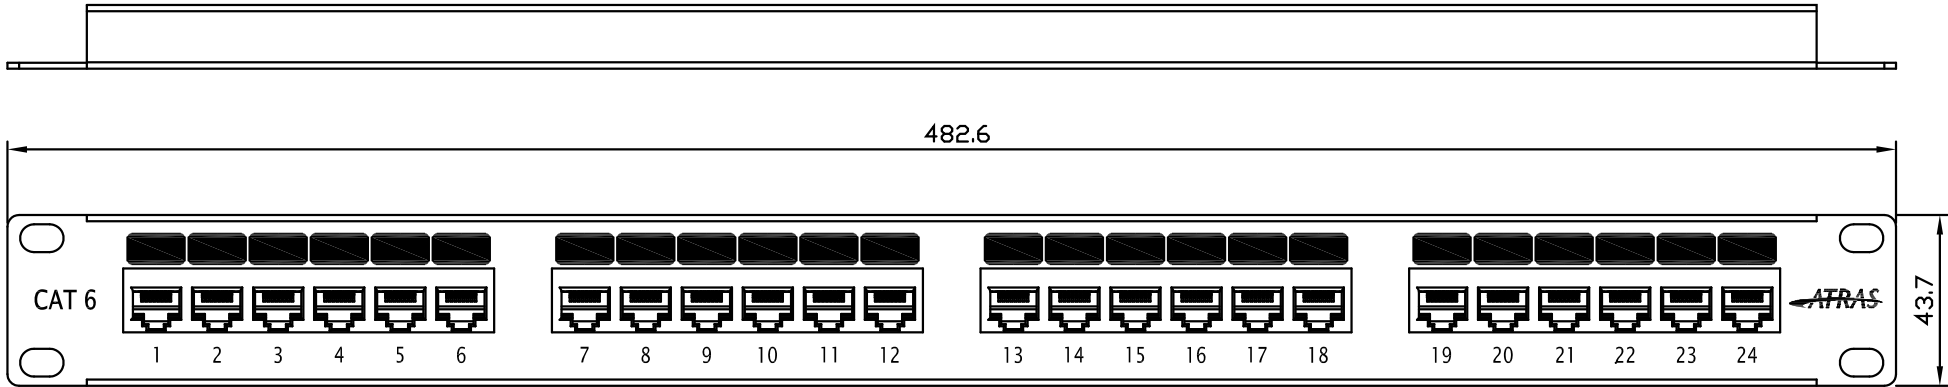

MODEL: ATS-C6-N-24P

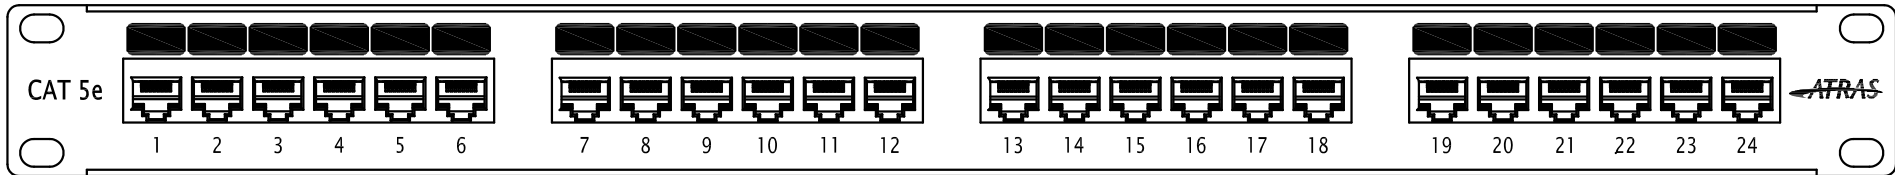

MODEL: ATS-C5E-N-24P

NOTE:

1. color : white Letters, Black Background

APPROVED BY

LOGO



TITLE		
24 PORT PATCH PANEL		
DIM.	SCALE	MODEL
MM=±3	Full	
MATERIAL		
COATING	HARDNESS	FINISH
DRAWN BY	CHECKED	APPROVED
Nana 2017/05/10		
L INTEK[®] ELECTRONICS INC.		
SHEET 2 OF 2		REV
DRAWING NO.		0
MTL-80086		

NO	DATE	BY	CHANGE	APPR.	DATE
REVISIONS					